
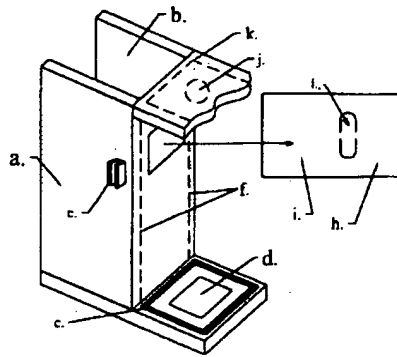


Amend of the Fig. 4
(prolong the dotted line)

original of the Fig. 4

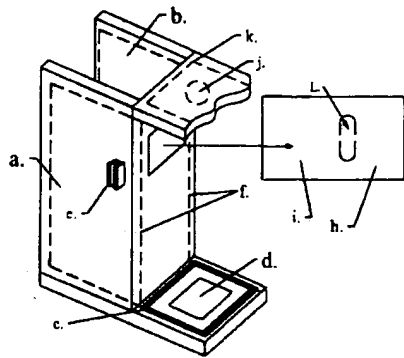

ATTACHMENT C -- PROPOSED DRAWING CHANGES

Approval of the proposed drawing changes marked in red on the following copies of Figures x-y and prolong the dotted line of Fig.4 f are respectfully requested.

(MARKED-UP SPECIFICATION)

Amend in page 13

(1) [Add passage] Passage checkroom structure and system setting:

- a. [FIG. 1-a & b. are shown, install]Two unidirectionally transparent bullet-proof glass doors are hiden as shown in Fig.1 a & b. When closed , the doors push out from the dotted line of Fig.1 f. Fig1.r. shown the check place which is enclose by closing two the doors. from the cabin to the passage as a second door, so that the pilot can see the passage unidirectionally, making hijackers conscious of someone looking at them in the dark.

original of the Fig. 1

